


Area Light / Area / PD-A-VAL

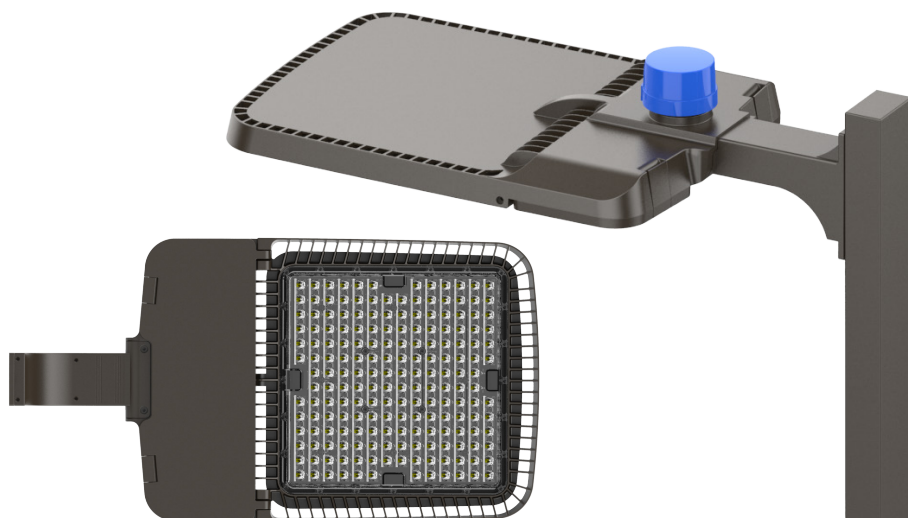

Floodlight for lighting parking lots, streets or any other outdoor use. Uniform self-cleaning function with circulating air cooling channel for efficient heat dissipation and extended floodlight life.

Respects dark sky compliance, with absolute coverage and no light directed upwards. Lens with rotating optics allows a variety of optic types. Selectable power and CCT.

A variety of mounting options. Power supply accessible via clips, no tools required. Optional adjustable "Plug & Play" motion sensor available. Excellent quality and energy saving lighting and maintenance free.

Model	PD-A-VAL 145	PD-A-VAL 300
-------	--------------	--------------

Power	75 W – 100 W – 145 W selectable	200 W – 230 W – 300 W selectable
Lumens	175 lm/W or 145 lm/W	
Input voltage	AC 10 0 – 277V / AC 200 – 480V	
Beam angles	Type III / Type IV / Type V	
IRC	75 +	
CCT	3,000K / 4,000K / 5,000K selectable	
Light source	Lumileds 5050	
Driver	Sosen / Meanwell	
Power factor	0.95 +	
Distorsion	< 15%	
Overvoltage protection	10 kV	
Operating temperature	-40°C ~ +50°C	
Dimming options	1-10V Dimmer / DALI / Zigbee / WIFI / PLC / Brightness sensor / Motion sensor / NEMA 7-pin / 3, 5 and 7-pin Photosensor	
IP	IP66	
Service life	180,000 h	
Dimensions	490 x 360 x 150 mm	620 x 450 x 150 mm
Weight	3.6 kg	6.2 kg
Warranty	5 years (8 to 10 years optional)	
Colour	Dark bronze (black, silver, white optional)	



lighting solutions
solutions d'éclairage


1435, chemin Saint-Armand
Saint-Armand (Québec)
J0J 1T0 Canada

(514) 433.3386
www.purplelighting.com
info@purpledistribution.com


Area Light / Area / PD-A-VAL

Accessories


Arm for round pole

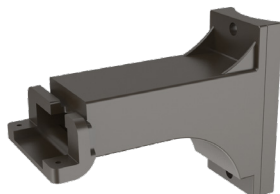


Slip filter




Arm for square pole

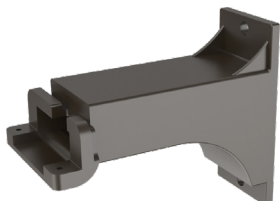


Trunnion assembly




Universal bracket

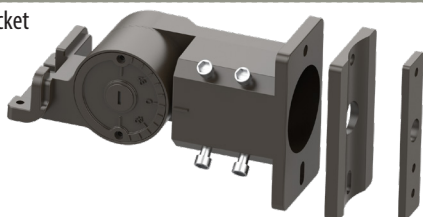

Lens

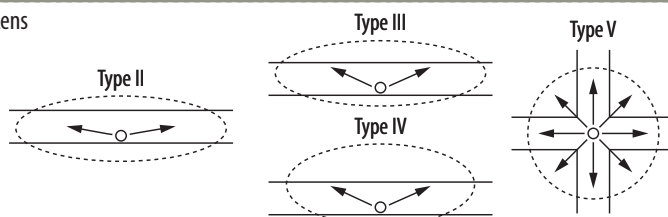

Multiple head assembly

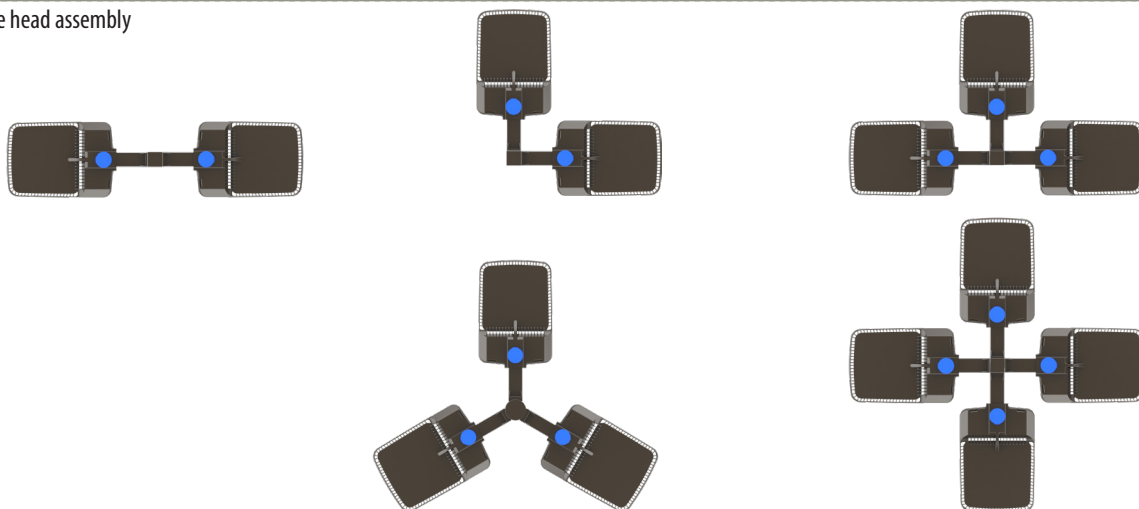

Adjustable motion sensor



Backlight shield

