


High Bay / Pathway / PD-A-EHB

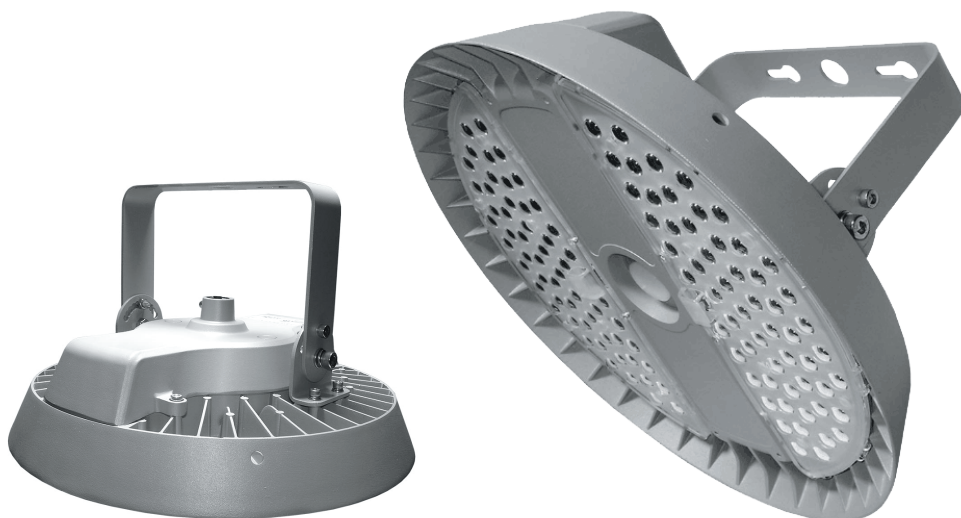

Lighting options aiming light just where you need it.

Easy snap-on lenses. Wide, medium, narrow or pathway lighting for use in storage areas, warehouses and other confined spaces.

Upward lighting option for ceilings and dark corners. Optional adjustable "Plug & Play" motion sensor available.

Excellent lighting, energy efficient and low maintenance costs.

Model	PD-A-EHB-75	PD-A-EHB-100	PD-A-EHB-120	PD-A-EHB-145	PD-A-VHB-180
-------	-------------	--------------	--------------	--------------	--------------

Power	75 W	100 W	120 W	145 W	180 W
Lumens	12,750 lm	17,000 lm	20,400 lm	24,650 lm	30,500 lm
Input voltage	AC 100 – 277 V / AC 249 – 528 V				
Beam angles	60° / 90° / 120° pathway lighting, 50° / 100° (custom lighting options) and reflectors				
IRC	73+ (80+ optional)				
CCT	3,000K / 4,000K / 5,000K				
Light source	Lumileds 5050				
LED pilot	Sosen / Meanwell				
Power factor	≥ 0.95				
Distorsion	< 15%				
Overvoltage protection	10 kV				
Operating temperature	-40°C ~ +50°C				
Dimming options	Dimmer 1-10 V / DALI / Zigbee / Bluetooth / Brightness sensor / Motion sensor				
IP	IP65				
Service life	50,000 h				
Dimensions	390 x 390 x 180 mm				
Weight	3.5 kg	3.7 kg		3.8 kg	4.2 kg
Warranty	5 years (10 years optional)				
Colour	Grey (black, silver, white optional)				



lighting solutions
solutions d'éclairage

1435, chemin Saint-Armand
Saint-Armand (Québec)
J0J 1T0 Canada

(514) 433.3386
www.purplelighting.com
info@purpledistribution.com

High Bay / Pathway / PD-A-EHB

Accessories

Supports



U-shaped bracket



Metal chain



1/2" to 3/4" NPT converter



Pendant installation




Reflectors



Direct NPT
pipe mounting



Snap-on lenses

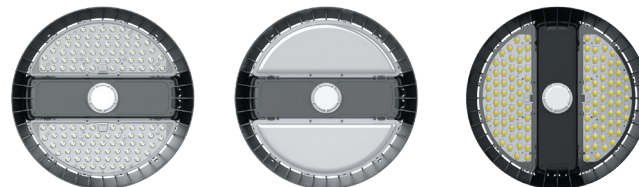

Indirect NPT
pipe mounting



Adjustable motion sensor



Pole mounting for
lighting fixtures
installed at height

